



SCHMITZ

A Sense of Confidence

Gynaecology, Urology and Proctology The perfect equipment to meet all requirements



Catalogue no. 75
Valid as of May 2010

conzentrum® The modular cabinet system for the gynaecologist

The concentrum® modular cabinet system has been developed in the light of our many years' experience in this field. For this reason, the system guarantees

best-possible working conditions and a high comfort of treatment in the gynaecologists' surgeries. Painstakingly worked high quality steel, a first class powder coated finish and a host of practical details ensure a long service life combined with the highest performance.



Illustrated colours:
Cabinet system –
working top: light grey 70
cabinet body, base: grey white RAL 9002
front panels: signal yellow RAL 1003
handles: grey white RAL 9002
Gynaecological chair –
upholstery: gold yellow 86
powder coated finish: grey white
RAL 9002
plastic cladding: silver-grey



411.630



411.625




Mobile gynaecological treatment cabinets comprising all facilities needed: instrument drawers, speculum preheating, equipment compartment and power points.

Note:
Please refer to page 15 of varimed catalogue no. 70 for our range of suitable examination stools and seats.



1

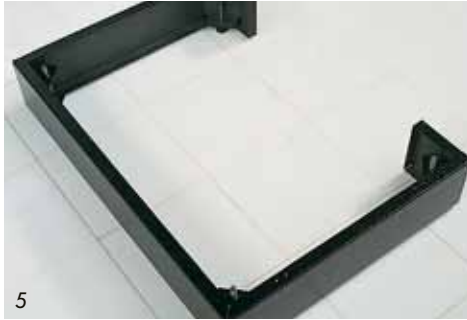

5

1 Schmitz-set, infinite horizontal and vertical adjustment of treatment unit.

2 Hinged cover exposing a removable instrument container of stainless steel, 15 litres capacity.

3 Push-in cabinet front exposing pull-out facilities.

4 Removable drawers, quiet and easy running, 4/5 pull out.



2



6

5 All cabinet bases fitted with 4 heavy-duty levelling screws.

6 Easy to move treatment cabinets.

7 Built-in speculum pre-heating. Regulation and control of the temperature by display, adjustable up to a max. of 40° C.

8 Efficient, easy to clean drawer insets.



3



7



4



8

conzentrum®

Model and material description

Cabinet bodies

are made of high-quality sheet steel, manufactured in self-supporting construction manner, with exceptional stability and outstanding sound damping, smooth surfaces at outside. All cabinet bodies are sealed with all-round sealing strips made of disinfectant-proof plastic material. The cabinet body is manufactured in one piece.

Doors- and drawer fronts

are made of high-quality double-skinned sheet steel, sound damped and with rounded edges.

Drawers

move on quadro-special-profile, full metal rails, four running paths. Excellent lateral and horizontal stability, easy running of drawers over the total length of telescopic rails. Drawers with 80 % pull out; they may be replaced without tools. With end stop and locking pin against rolling-out.

Interior dimensions of drawers, effective size

(W x H x D):

type A 415 x 60 x 315 mm

type B 415 x 130 x 315 mm

type C 415 x 190 x 315 mm

type D 415 x 235 x 315 mm

The effective height of top drawer is always 20 mm less than mentioned above.

Handles

ergonomically designed, distance of holes: 192 mm. The surface is resistant to chemicals, easily cleaned and disinfected. Handles get a polyester powder coating in the same colour as the drawer fronts or in different colours as per our colour chart on page 54.

Bases

all bases are fitted with 4 levelling feet.

Working tops

plastic-laminated veneer of 30 mm thickness acc. to DIN 68763 E 1, resin impregnated underside. With rounded front edge, radius of 10 mm. Maximum length of top: 4100 mm. Surface with structure, resistant to diluted alkaline substances. Standard colours for working tops: pearl white 60 or light grey 70.

Wash basin

basins of porcelain and stainless steel are let-in flush into working tops, fitted w/o joints with waterproof hydraulic glue.

Installation

upon request, assembly of cabinet systems at site by our service engineers. Corresponding charges on inquiry!

Powder coated finishes

conzentrum® cupboard units get a high-quality multilayer gloss paint with an extreme resistance to shocks and scratches, easy cleansed, disinfectant-proof, resistant to heat and ultraviolet rays.

Standard colours of the cabinet bodies: grey white RAL 9002, pure white RAL 9010 or grey aluminium RAL 9007.

The Schmitz colours acc. to the colour chart on page 54 are available for doors, drawer fronts, handles and panels without additional costs.

Standard colours for bases:

black	RAL 9005 structured,
grey white	RAL 9002 structured,
pure white	RAL 9010 structured,
grey aluminium	RAL 9007 structured.

Further optional finishes for cabinet bodies (ref. no. 400.800) and bases (ref. no. 400.801) in Schmitz colours acc. to the colour chart on page 54 are available for an extra charge.

Further special RAL colours on request.

Standard colours for working tops: pearl white 60 or light grey 70.

Ordering instructions

We are requesting the following information:

Working tops: pearl white 60 or light grey 70



Cabinet bodies: RAL 9002, RAL 9010, RAL 9007 (standard) or acc. to our colour chart for an extra charge

Cabinet fronts: acc. to our colour chart

Handles: acc. to our colour chart or matt chromium-plated



Bases: RAL 9005, RAL 9002, RAL 9010, RAL 9007 (standard) or acc. to our colour chart for an extra charge

conzentrum® Arrangement examples

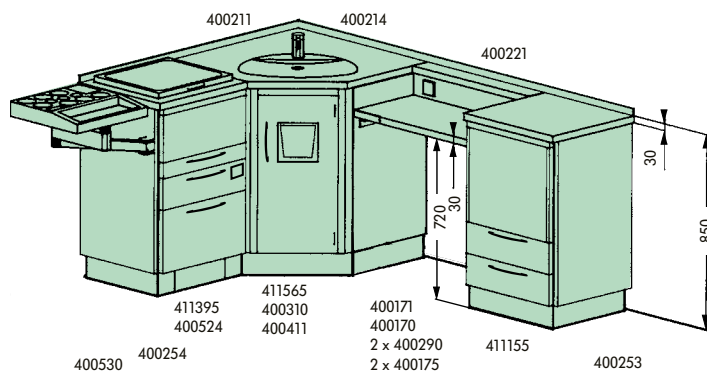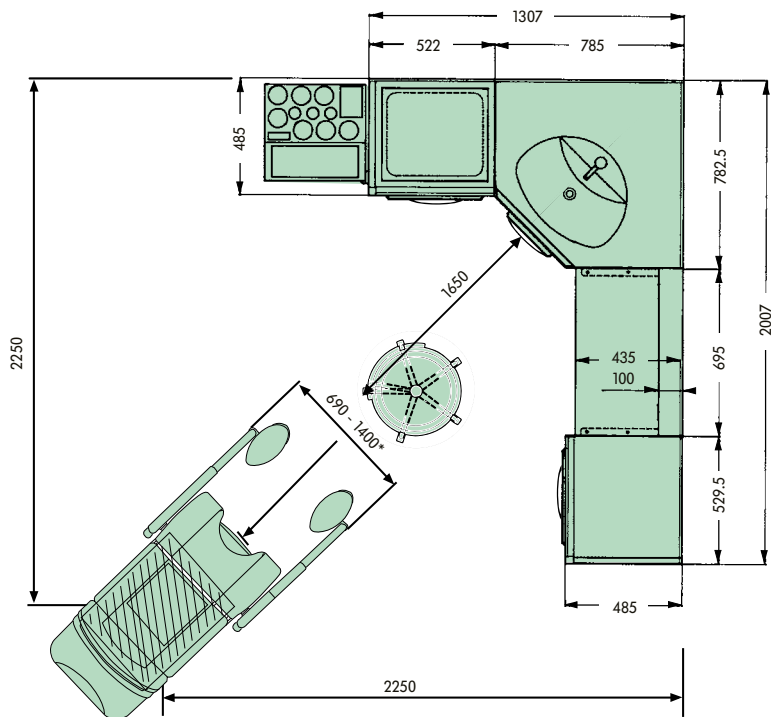


For chairs with earth connection, the cabling must be within the range (575 x 1,050 mm) of the floor space required (hatched area). The gynaecology chair can be placed and moved within this area.


*Total dimensions of the chair in examination position

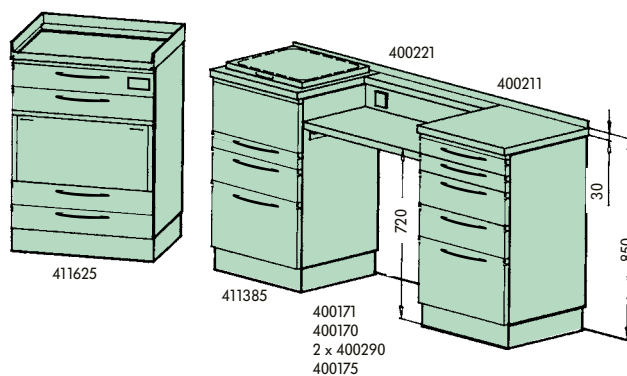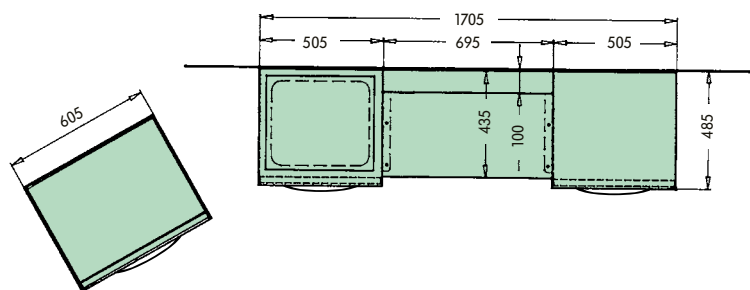


Planning instructions, scale drawings 1:25

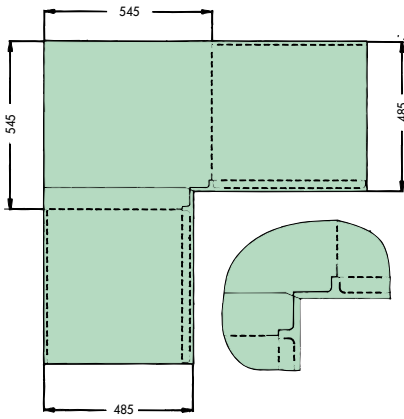

Corner cabinet unit 90 degrees

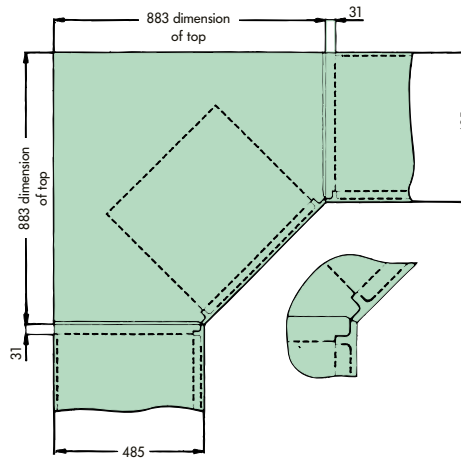


Corner cabinet unit 135 degrees




Wall to wall cabinet unit


For cabinets with drawers placed at the left or right wall side, a panel of no less than 30 mm has to be considered!

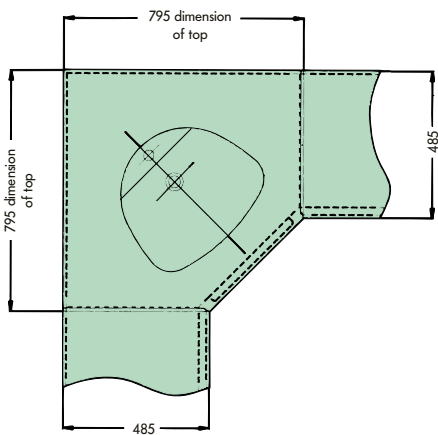

Corner cut-out with integrated wash basin



Cut-out of wash basin

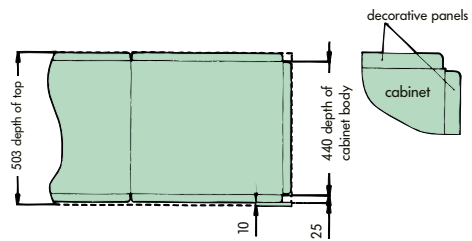
















Suggestion with decorative panels

conzentrum®

Treatment cabinets, instrument cabinets

Utility cabinets, multi-purpose cabinets

Standard height 850 mm
(incl. 100 mm socle and 30 mm working top),
standard width 500 mm, standard depth 465 mm,
depth of working tops 485 mm.
W/o working top.

Model No.	Description	Model No.	Description	Model No.	Description
 411.025 Treatment cabinet 4 drawers type A, 3 drawers type B		 411.035 Treatment cabinet 2 drawers type A, 4 drawers type B		 411.055 Treatment cabinet 2 drawers type A, 2 drawers type B, 1 drawer type D	
 411.115 Treatment- and instrument cabinet push-in flap with tip-mechanism, exposing 3 pull-outs and 2 sockets, 2 drawers type B		 411.155 Instrument cabinet push-in flap with tip-mechanism, exposing 2 pull-outs and 2 sockets, 2 drawers type B			
 411.215 Treatment cabinet with SCHMITZ-set push-in flap with tip-mechanism, exposing 1 SCHMITZ-set, 1 drawer type B		 400.530 SCHMITZ-set treatment unit* infinite horizontal and vertical adjustment, mounted on LHS of cabinet, universal treatment unit for instruments and medicaments, disposables etc., ideal for all disciplines, swivel-mounted arm		 400.531 SCHMITZ-set treatment unit* as 400.530, but mounted on RHS of cabinet * These sets are only available in combination with concentrum cabinets, w/o castors (otherwise there's a risk of tilting). SCHMITZ-set , consisting of the following equipment: 1 stainless steel tray 3 glass dishes with lid 3 glass bottles 1 low and 3 deep stainless steel containers 1 lens carrier	
 411.275 Utility cabinet 5 drawers type BB		 411.285 Utility cabinet 3 drawers type B, 1 drawer type D			
 411.315 Utility cabinet 1 RH hinged door, 3 adjustable plastic shelves, standard width 500 mm		 411.325 Utility cabinet 1 LH hinged door, 3 adjustable plastic shelves, standard width 500 mm			
 411.355 Multi-purpose cabinet 2 drawers type A, 2 drawers type B, 1 drawer with tip-mechanism and interior refuse collector		 411.385 Multi-purpose cabinet with detachable s/s instrument container, embedded in top, capacity: 15 litres, hinged cover of plastic material. 1 drawer type A 1 drawer type B 1 drawer type D		 411.395 Multi-purpose cabinet with detachable s/s instrument container, embedded in top, capacity: 15 litres, hinged cover of plastic material. 1 drawer type A, 1 drawer type B, 1 drawer with tip-mechanism and interior refuse collector	

Model No. Description Model No. Description

Wash basin cabinets

Standard height 850 mm (incl. 100 mm socle and 30 mm working top), standard width 500 mm, standard depth 465 mm, depth of working tops 485 mm. W/o working top.

411.465



Wash basin cabinet

for small porcelain basin or stainless steel basin, 1 flap door with tip-mechanism and interior refuse collector, without fittings

411.485



Wash basin cabinet

for small porcelain basin or stainless steel basin, RH hinged door with insert slot and refuse bucket, without fittings

411.505

same execution as 41148.5, but LH hinged door

Corner cabinets, wash basin cabinets

Standard height 850 mm (incl. 100 mm socle and 30 mm working top), standard meas. of sides 770 x 770 mm, standard meas. of working top sides 780 x 780 mm. W/o working top.

411.555



Corner cabinet

1 RH hinged door, 1 adjustable plastic shelf

411.545

same execution as 411.545, but LH hinged door

411.565



Wash basin corner cabinet

for large porcelain basin or stainless steel basin, 1 RH hinged door with insert slot and refuse bucket, without fittings

411.585

same execution as 411.565, but LH hinged door

Gynaecological treatment cabinets

Standard height 850 mm (incl. 100 mm socle and 30 mm working top), standard width 600 mm, standard depth 465 mm, depth of working tops 485 mm. W/o working top.

Interior dimensions of drawers, effective size for 411.615 – 411.625 (W x H x D): 515 x 95 x 315 mm
Pull-out 515 x 170 x 315 mm

The effective height of top drawer is always 20 mm less than stated above.

Note:

2nd drawer with speculum pre-heating 400.525 available on request. Please refer to page 30.

411.615



Treatment cabinet

CE/93/42/EEC

upper section: 2 drawers, 1 of which with preheating element connected load: 2300 V, average power input: 20 W, electrical connection at the back, cable with plug approx. 2 m long. Regulation and control of the temperature by display, adjustable up to a max. of 40° C, for instruments (e.g. specula), 1 push-in flap with tip mechanism and interior equipment compartment with 2 sockets and 1 pull-out. Lower section: 2 drawers.

411.630



Treatment cabinet CE/93/42/EEC

Mobile, 4 castors, Ø 50 mm, electrically conductive, height 1090 mm, incl. base 100 mm, width 600 mm, depth 485 mm, with top frame and plastic cover plate, silver grey, treatment set for holding instruments, pharmaceuticals, disposables etc., 1 drawer Type 6A at the top, 1 drawer 100 mm height with preheating, connected load 230 V, average power input 20 W, electrical connection at the back, cable with plug, 2 m long, adjustment up to 40° C max., for instruments (e.g. specula), below 1 drawer Type 6A, 3 drawers 100 mm height and 1 drawer Type 6B

Interior dimensions of drawers (effective size W x H x D):

Type 6A	515 x 60 x 315 mm
Type 6B	515 x 130 x 315 mm
Panel height 100 mm	515 x 95 x 315 mm

The effective height of top drawer is always 20 mm less than stated above.

411.625




Treatment cabinet, mobile CE/93/42/EEC

same execution as 41161.5, but mobile, 4 swivel castors Ø 50 mm, electrically conductive. Plastic top (white) with 3-sided guard rail, included

conzentrum® Accessories


Model No. Description

400.015 **Drawer inset**
plastics, grey,
for drawer type A




Model No. Description

400.016 **Drawer inset**
plastics, grey,
for drawer type A




Model No. Description


400.017 **Drawer inset**
plastics, grey,
for drawer type A



400.050 **Drawer inset**
plastics, grey,
for drawer type B



400.060 **Drawer inset**
plastics, grey,
for drawer type B



400.492 **Plastic shelf**
for cupboards
500 mm wide

400.524 **Preheating element *****
CE / 94/42/EEC
Regulation and control of the temperature by display, adjustable up to a max. of 40° C, for instruments (e.g. specula), for drawer type B, for cabinets 500 mm wide, connected load: 230 V, average power input: 20 W, electrical connection at the back, cable with plug approx. 2 m long
(several pre-heating elements possible per cabinet, on application)

400.525 **Preheating element *****
CE / 94/42/EEC
Regulation and control of the temperature by display, adjustable up to a max. of 40° C, for instruments (e.g. specula), for 2nd drawer from the top of cabinet models: 411.615/411.625, connected load: 230 V, average power input: 20 W, electrical connection at the back, cable with plug approx. 2 m long
(several pre-heating elements possible per cabinet, on application)

*** Please note that the preheating elements cannot be installed in pull-outs of cabinets 411.115 and 411.155 nor in drawers type A.


Attention:
Preheating elements model nos. 400.524 and 400.525 are medical devices and are only available in combination with our concentrum® drawer cabinet units.
Please observe legal requirements!

400.211 **Working top**
with plastic-laminated veneer, rounded front edge, 30 mm thick, up to depths of 600 mm, price per metre


400.212 **Working top**
with plastic-laminated veneer, rounded front edge, 30 mm thick, up to depths of 900 mm, price per metre

400.213 **Working top**
with plastic-laminated veneer, rounded front edge, 30 mm thick, up to depths of 1,200 mm, price per metre

400.214 **Working top**
for corner cabinet
up to a depth of 600 mm



400.215 **Working top**
with plastic-laminated veneer, rounded front edge, 30 mm thick, up to depths of 900 mm, price per metre



400.221 **Wall-connecting profile**
white, price per metre



400.310 **Water mixing battery**
chromium-plated,
for high-pressure



400.311 **Water mixing battery**
as model 400.310,
for low-pressure

400.372 **Electro-magnetic control** CE/89/336/EEC
for water inlet, for high pressure


400.373 **Electro-magnetic control** CE/89/336/EEC
for water inlet, for low-pressure

400.330 **Soap dispenser**
complete




Model No. Description

400.170 Writing/microscopic top
suspended,
w/o front panel
for cable channel,
price per 10 cm



Model No. Description

400.171 Front panel
for cable channel,
of powder coated sheet
steel, price per 10 cm




Model No. Description

400.175 Socket, white
integrated
in rear channel,
w/o wiring


400.290 Supporting angle
for supporting working/
microscopic tops



400.295 Bracket
to mount working
tops to the wall




400.300 Supporting legs
for extended
working tops




400.716 Supporting frame
for supporting working tops
without underbench cabinet,
price per 10 cm

400.248 Side section
right, 420 mm deep,
to support the writing/
microscopic top 400.170



400.249 Side section
left

400.251 Side section
right, 440 mm deep,
for 850 mm high cabinets,
to support extended tops



400.252 Side section
left

400.253 Decorative side panel
right, 440 x 720 x 22 mm

400.260 Side panel
rear, RH, with socle,
up to 350 mm

400.271 Front panel
with socle,
up to 350 mm

400.254 Decorative side panel
left, 440 x 720 x 22 mm

400.265 Side panel
rear, LH, with socle,
up to 350 mm

400.281 Back wall
with socle,
from 350 mm up,
price per 10 cm


400.285 Panel 135 deg.
with socle, side dimension:
35 x 35 mm

400.288 Back panel
for corner cabinets
with wash basin
411.565 up to 411.595


400.121 Mobility
for 500 mm wide cabinets,
with guiding bar, final height of
cabinet 850 mm
(not possible for cabinet models
411.355, 411.395)

400.286 Panel 90 deg.
with socle, side dimension:
70 x 70 mm


400.401 Porcelain wash basin
with overflow vent and
bore hole for water mixing
battery, embedded in top,
without top (for wash
basin cabinets)



400.411 Porcelain wash basin
(large), with overflow vent and
bore hole for water mixing
battery, embedded in top,
without top (for corner
cabinets)



400.421 Stainless steel wash basin
with overflow vent,
embedded in top,
without top
(for wash basin cabinets)



conzentrum® and Orbit Doctor's work places for gynaecology and proctology



2













Illustrated colours:
modules –
cabinet body, front panels,
bases: fir green RAL 1703020
handles: matt chromium-plated
top: light grey or silver grey
Gynaecological chair – upholstery: moss green
powder coated finish: grey aluminium RAL 9007
plastic cladding: silver grey

Orbit










Dispensing modules

Supply and disposal modules

Microscopy centre, worktables

Model No.	Description
420.200	 <p>Dispensing module € 93/42/EEC module dimensions 660 x 785 x 525 mm (W x H x D), with hood, plastic cover plate with treatment set for holding instruments, pharmaceuticals, disposables etc., 1 drawer Type 6A, 1 drawer Type 6B with preheating for instruments (e.g. speculum),* delivery rate 230 V, average power input 20 W, cable with mains plug, approx. 2 m long, regulation and control of the temperature by display, adjustable up to a max. of 40° C, 1 drawer Type 6C.</p>
420.201	 <p>Dispensing module € 93/42/EEC module dimensions 660 x 920 x 525 mm (W x H x D), with hood, plastic cover plate with treatment set for holding instruments, pharmaceuticals, disposables etc., 1 drawer Type 6A, 2 drawers Type 6B, including 1 with additional preheating for instruments (e.g. speculum),* delivery rate 230 V, average power input 20 W, cable with mains plug, approx. 2 m long, regulation and control of the temperature by display, adjustable up to a max. of 40° C, 1 drawer Type 6C.</p>
420.205	 <p>Dispensing module € 93/42/EEC module dimensions 660 x 785 x 525 mm (W x H x D), with hood, plastic cover plate with treatment set for holding instruments, pharmaceuticals, disposables etc., 3 drawers Type 6B including 1 with preheating for instruments (e.g. speculum),* delivery rate 230 V, average power input 20 W, cable with mains plug, approx. 2 m long, regulation and control of the temperature by display, adjustable up to a max. of 40° C.</p>
420.206	 <p>Dispensing module € 93/42/EEC module dimensions 660 x 920 x 525 mm (W x H x D), with hood, plastic cover plate with treatment set for holding instruments, pharmaceuticals, disposables etc., 4 drawers Type 6B including 1 with additional preheating for instruments (e.g. speculum),* delivery rate 230 V, average power input 20 W, cable with mains plug, approx. 2 m long, regulation and control of the temperature by display, adjustable up to a max. of 40° C.</p>
420.210	 <p>Dispensing module € 93/42/EEC module dimensions 660 x 665 x 525 mm (W x H x D), equipped like 420.200, but without hood.</p>
420.220	 <p>Dispensing module € 93/42/EEC module dimensions 660 x 545 x 525 mm (W x H x D), equipped like 420.200, but without hood and treatment set. With smooth plastic cover plate and three-sided profile edge.</p>
420.211	 <p>Dispensing module € 93/42/EEC module dimensions 660 x 800 x 525 mm (W x H x D), equipped like 420.201, but without hood.</p>
420.221	 <p>Dispensing module € 93/42/EEC module dimensions 660 x 680 x 525 mm (W x H x D), equipped like 420.201, but without hood and treatment set. With smooth plastic cover plate and three-sided profile edge.</p>
420.215	 <p>Dispensing module € 93/42/EEC module dimensions 660 x 665 x 525 mm (W x H x D), equipped like 420.205, but without hood.</p>
420.225	 <p>Dispensing module € 93/42/EEC module dimensions 660 x 545 x 525 mm (W x H x D), equipped like 420.205, but without hood and treatment set. With smooth plastic cover plate and three-sided profile edge.</p>
420.216	 <p>Dispensing module € 93/42/EEC module dimensions 660 x 800 x 525 mm (W x H x D), equipped like 420.206, but without hood.</p>
420.226	 <p>Dispensing module € 93/42/EEC module dimensions 660 x 680 x 525 mm (W x H x D), equipped like 420.206, but without hood and treatment set. With smooth plastic cover plate and three-sided profile edge.</p>

* upon request with add'l preheating for drawer Type 6B (model no. 400.256)
 (not possible for model 420.200, 420.205, 420.210, 420.215, 420.220, 420.225)

Model No.	Description
420.240	<p>Disposal module module dimensions 565 x 560 x 560 mm (W x H x D), removable 20-litre container (internal dimensions: 285 x 205 x 345 mm W x D x H) with screen insert for instrument disposal, plus removable 10-litre container (internal dimensions: 205 x 135 x 360 mm W x D x H) for disposables etc., cover can be lifted using front-side step lever made of stainless steel.</p>
	
420.242	<p>Disposal module module dimensions 400 x 500 x 320 mm (W x H x D), removable 20-litre container (internal dimensions: 285 x 205 x 345 mm W x D x H) with screen insert for instrument disposal. plastic enamel coating acc. to colour chart w/o surcharge.</p>
	
420.250	<p>Disposal module module dimensions 375 x 810 x 295 mm (W x H x D), for holding a 60 litre waste bag, swinging cover flap of grey colour. plastic enamel coating acc. to colour chart w/o surcharge.</p>
	
420.260	<p>Supply module module dimensions 560 x 680 x 525 mm (W x H x D), 4 drawers Type 5B.</p>
	
420.265	<p>Supply module module dimensions 560 x 680 x 525 mm (W x H x D), 2 drawers Type 5A, 1 drawer Type 5B, 1 drawer Type 5D.</p>
	
420.270	<p>Supply module module dimensions 560 x 680 x 525 mm (W x H x D), 2 drawers Type 5B, 1 drawer Type 5D.</p>
	
420.280	<p>Microscopy centre moulded plastic element in silver-grey with integrated disposal box for contaminated material, 2 power sockets, 4 table legs ø 60 mm, 800 x 850 x 550 mm (W x H x D).</p>
	
420.290	<p>Worktable plastic veneer plate, 30 mm thick, with rounded front edge, in pearl white or light grey, 4 table legs ø 60 mm, 800 x 850 x 550 mm (W x H x D), for storing one module.</p>
	
420.295	<p>Worktable 1500 x 850 x 550 mm, for storing 2 modules, work tables also available in other dimensions. Price upon request.</p>
	

Orbit

Model and material description

Cabinet bodies

are made of high-quality sheet steel, manufactured in self-supporting construction manner, with exceptional stability and outstanding sound damping, smooth surfaces at outside. All cabinet bodies are sealed with all-round sealing strips made of disinfectant-proof plastic material. The cabinet body is manufactured in one piece.

Drawer fronts

are made of high-quality double-skinned sheet steel, sound damped and with rounded edges.

Drawers

move on quadro-special-profile, full metal rails, four running paths. Excellent lateral and horizontal stability, easy running of drawers over the total length of telescopic rails. Drawers with 80 % pull out; they may be replaced without tools. With end stop and locking pin against rolling-out.

Interior dimensions of drawers, effective size (W x H x D):

type 5A 415 x 60 x 315 mm

type 5B 415 x 130 x 315 mm

type 5D 415 x 235 x 315 mm

type 6A 515 x 60 x 315 mm

type 6B 515 x 130 x 315 mm

type 6C 515 x 190 x 315 mm

The useful height is diminished by 20 mm in the upper most drawer.

Handles

ergonomically designed, distance of holes: 192 mm. The surface is resistant to chemicals, easily cleaned and disinfected. Handles get a polyester powder coating in the same colour as the drawer fronts or in different colours as per our colour chart.

Castors

the modules are equipped with 4 double castors of Ø 50 mm, antistatic.

Tops of modules

silver grey. Smooth top of solid, antistatic plastic material; resistant to scratches and disinfectants. With three-sided profile edge, impregnated underside. Easy-care and hygienic top.

Tops of work tables

plastic-laminated veneer of 30 mm thickness acc. to DIN 68763 E 1, resin impregnated underside. With rounded front edge, radius of 10 mm. Surface with structure, resistant to diluted alkaline substances. Standard colours for working tops: pearl white 60 or light grey 70.

Powder coated finishes

Orbit modules get a high-quality multilayer gloss paint with an extreme resistance to shocks and scratches, easy cleaned, disinfectant proof, resistant to heat and ultraviolet rays.

Standard colours of the cabinet bodies and work table legs: grey white RAL 9002, pure white RAL 9010 or grey aluminium RAL 9007.

Further optional finishes for Schmitz cabinet bodies and work table legs acc. to the colour chart on page 54 are available for an extra charge (ref. no. 400.800).

The Schmitz colours acc. to the colour chart on page 54 are available for drawer fronts and handles without additional costs.

Further special RAL colours on request.

Ordering instructions

We are requesting the following information:

Tops of work tables: pearl white 60 or light grey 70





Tops of modules: silver grey

Cabinet bodies and work table legs: RAL 9002, RAL 9010, RAL 9007 (standard) or acc. to our colour chart against surcharge

Cabinet fronts: acc. to our colour chart

Handles: acc. to our colour chart or matt chromium-plated

4 gynaecologist's workplaces equipped with Orbit

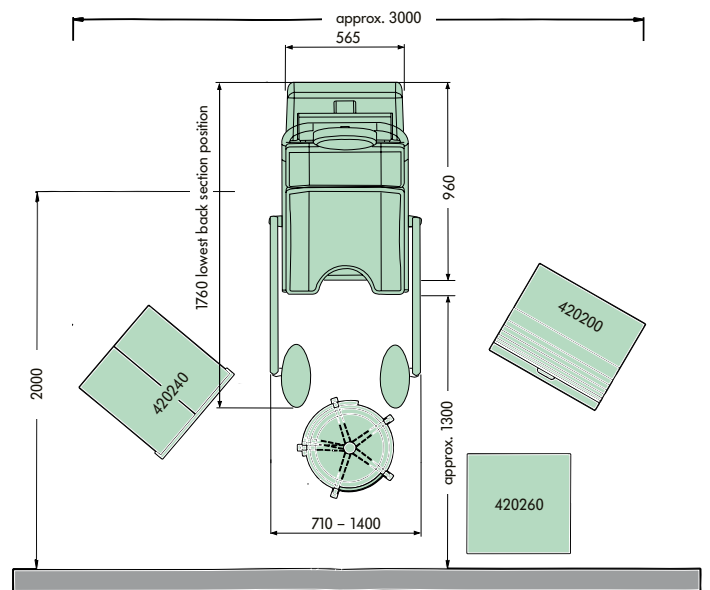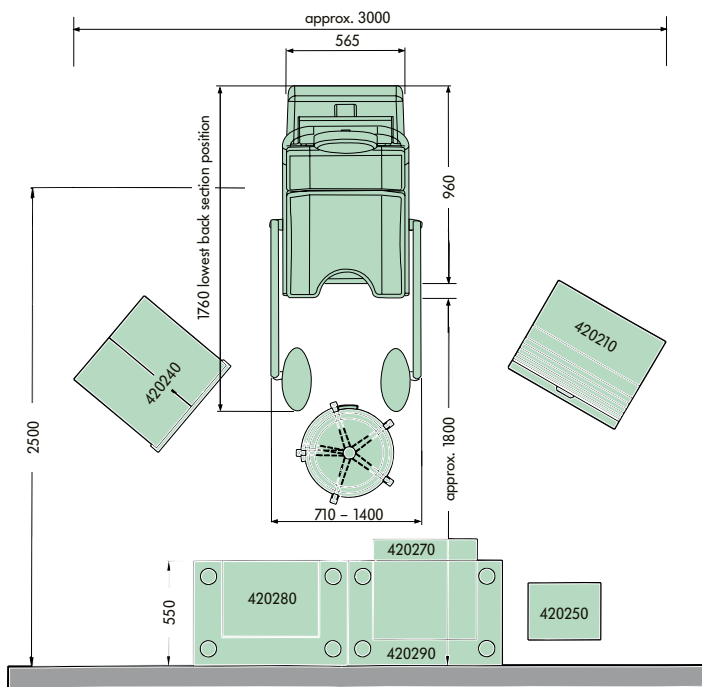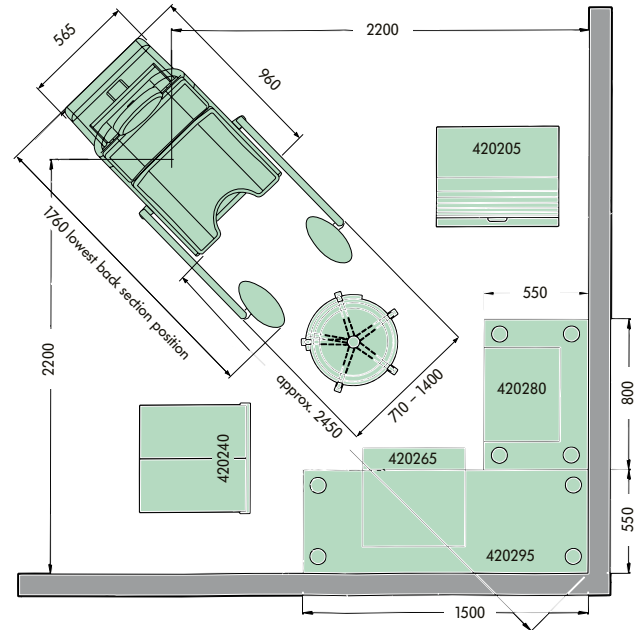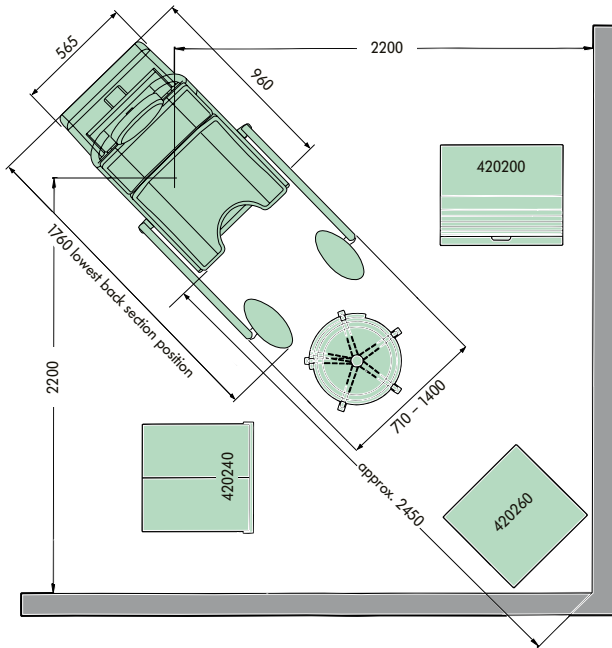

For chairs with earth connection, the cabling must be within the range of the floor space required for installation (960 x 565 mm). The gynaecology chair can be placed and moved within this area.



Schmitz u. Söhne GmbH & Co. KG

P. O. Box 14 61
58734 Wickede (Ruhr)
Germany (postal address)
Zum Ostenfeld 29
58739 Wickede (Ruhr)
Germany (visiting address)
Phone +49 (0) 2377-84-0
Fax +49 (0) 2377-84-135
www.schmitz-soehne.com
export@schmitz-soehne.de

Technical service, hotline:
Phone +49 (0) 2377 84549
Fax +49 (0) 2377 84210
service@schmitz-soehne.de

Schmitz abroad: Switzerland

SCHMITZ AG
Schloss-Strasse 67
8207 Schaffhausen
Phone +41 (0) 52 6 43 25 05
Fax +41 (0) 52 6 43 26 91
f.poncet@bluewin.ch

SCHMITZ AG
Francois Poncet
Chemin de Bois 32
1020 Renens VD
Phone +41 (0) 21 6 91 74 66
Fax +41 (0) 21 6 91 74 62
Mobile 079-2128334
f.poncet@bluewin.ch

Spain

SCHMITZ u. Söhne Ibérica S.L.
Centro de Negocios Tartessos
Edificio Artemisa
C/Pollensa, n° 2 – Oficina 3
28290 Las Rozas (Madrid)
Phone +34 (0) 91 6 40 45 14
Fax +34 (0) 91 6 36 63 05
schmitz@schmitz.es

Italy

SCHMITZ ITALIA S.r.l.
Daniela Capeletti
Piazza Garibaldi 20
15076 Ovada (AL)
Phone +39 (0) 43 8 03 50
Fax +39 (0) 43 83 42 53
Mobile 349-6338723
info@schmitz-italia.it
www.schmitz-italia.it

France

SCHMITZ FRANCE SAS
Za du Serroir n° 2
54690 Lay Saint Christophe
Phone +33 (0) 3 83 22 94 67
Fax +33 (0) 3 83 22 82 38
info@schmitz-france.fr

Russia and Eastern Europe

Schmitz u. Söhne GmbH & Co. KG
Sergey Kosolapov
Bornaische Str. 180
04279 Leipzig
Germany
Phone +49 (0) 3 41 3 37 80 34
Fax +49 (0) 3 41 3 37 80 35
Mobile +49 (0) 1 52 09 07 70 58
kosolapov@t-online.de

China

Schmitz u. Söhne GmbH & Co. KG
Guangzhou Representative Office
World Trade Centre,
North Tower 3105
Huan Shi East Road 371-375
Guangzhou 510095
Phone +86 (0) 20 87 61 33 01
Fax +86 (0) 20 87 60 39 23
info@schmitz-soehne.cn

Latin America

Schmitz u. Söhne GmbH & Co. KG
Alfredo Gentile
Av. Córdoba 1513 Piso 8, Oficina A
Buenos Aires, Argentina
Phone +54 (0)11 4811 4642
Fax +54 (0)11 4811 4642
Mobile 0911 6887 2086
gentile@schmitz-soehne.de

All articles including corresponding accessories marked with the CE label meet the standards for medical devices acc. to MPG and the EC regulation 93/42/EEC.



The products may only be used for their intended purpose of use. Please also observe our operating manual!



The complete Schmitz-products range



DIAMOND
A class of its own



OPX Operating Tables for Out-patient Departments and Operating Theatres
Unique Flexibility and Reliability



varimed® Furniture for OR theatres and day-surgery



STL 285, STS 282, STX 280
The Patient Transport Systems for Emergencies, Outpatient Depts., Intensive Care and X-Ray



varimed® The trolleys – our experts for everyday clinical practice



varimed® Medical Furniture for Examination and Treatment Areas



Partura®
The Schmitz delivery table comfortable and safe delivery – with focus on preventive obstetrics